



# Premium Special Event Seating

Century's mobile TSP8VIP TranSport Mobile Grandstands offer premium seating with enhanced spectator comfort for upscale outdoor special events.


TSP8VIP grandstands feature 8 rows of all-weather molded individual seats with backrests and folding seat bottoms.

Equipped with a self-contained hydraulic actuation system, TSP8VIP bleachers feature push-button operation, and time saving efficiency. Extensive use of aluminum keeps towing weight to a minimum, reducing site impact while enhancing corrosion resistance.

Optional features including sun or weather canopies permit custom tailoring of the grandstands for increased spectator comfort.

# Transport MOBILE BLEACHERS

## TSPVIP8 Specifications

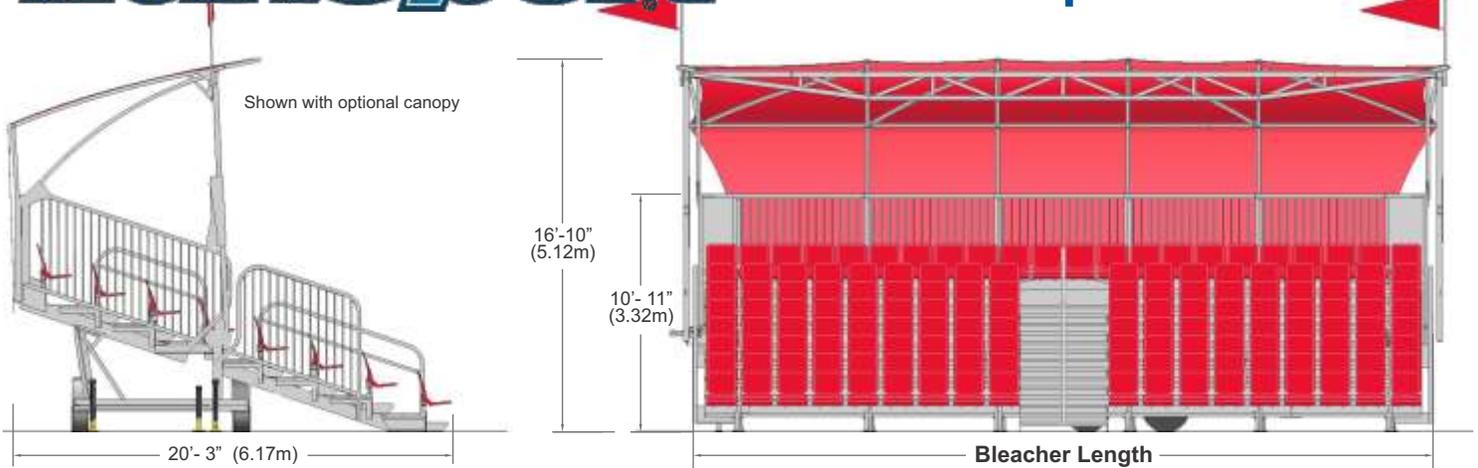

MODEL	SEATING			TRAILER DIMENSIONS			BLEACHER DIMENSIONS			Weight **
	Capacity*	Rows	Length	Width	Length**	Height	Length	Depth	Height **	
TSPVIP8 - 32	147	8	31'-6" (9.60 m)	8'-2" (2.49 m)	38'-5" (11.71 m)	13' (3.97 m)	32'-6" (9.91 m)	20'-3" (6.17 m)	10'-11" (3.33 m)	6940 lbs (3150 kg)
TSPVIP8 - 45	219	8	45'-0" (13.72 m)	8'-2" (2.49 m)	51'-11" (15.82 m)	13' (3.97 m)	46' (14.02 m)	20'-3" (6.17 m)	10'-11" (3.33 m)	8750 lbs (4000 kg)

\* Seating capacity calculated without armrest option. \*\* Trailer length includes hitch. \*\*\* Guardrail above ground level. \*\*\*\* Standard Bleacher

### Overview

- 8 Seat rows
- Individual weather-resistant seats with backs and flip-up seat bottoms
- 30" Seat row spacing for increased comfort
- Aisle with ADA handrails - standard
- Uniform slope for increased safety and codes
- Concealed hinge points
- Push-button hydraulically powered setup
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- IBC2009 code compliance standard

### Support Structure

- 7" aluminum channel support structure

### Guardrails

- Aluminum construction
- Rounded guardrails for spectator comfort
- Attached to bleacher structure for automatic set up and positioning

### Footboards

- Full-width footboards
- Enclosed risers - standard

### Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed compartment
- Hydraulic actuation cylinder is retracted during transport and storage for maximum protection from damage and corrosion.

### Leveling/Support

- Multiple jacks permit bleacher operation on soft surfaces.
- Automatically deployed jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel on unlevel or uneven terrain.

### Transport

- Hitch – retractable, with choice of pintle, 2 5/16" ball coupler, or 2" (50mm) ball coupler
- Retractable hitch – permits end-to-end bleacher placement
- Electric brakes
- Highway rated tires
- Rugged rubber-ride suspension
- Fenders with mud flaps
- LED DOT marker and signal lights

### Weather Resistance

- Steel components plated or hot-dipped galvanized after fabrication
- Extensive use of corrosion-resistant aluminum
- Molded seats

### Optional Features

- Sun or weather canopy
- Cup holders
- Numbered seats
- Solar battery charger
- Hydraulic brakes
- Spare tire

06/2013